




## Key Features

- ViewBoard® Cast 4-way split screen content sharing software
- USB Plug and Play
- Remote Management with vController™ Software
- Supports HDMI CEC Pass Through
- Embedded LAN, Optional Wi-Fi, Internet Browser

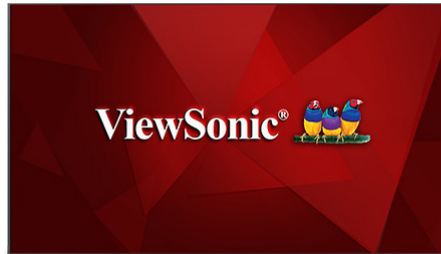

## Product Description

The ViewSonic® CDE9800 is a 98" 4K Ultra HD commercial display for meeting rooms. This display provides immersive and high-impact presentation with stunning 3840x2160 resolution, 500-nit typical high brightness, wide viewing angles, dual 16W speakers, and content sharing software. The built-in ViewBoard® Cast software enables wireless content streaming from mobile devices onto the display. In addition to HDMI and VGA inputs to connect with various high definition devices, this display utilises an integrated multi-core processor, allowing customers to playback multimedia content via USB without the need for a PC. To make life even easier, the vController™ software offers easy maintenance and intuitive interfaces for remote management via a PC server or laptop.

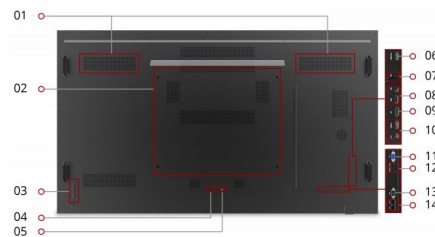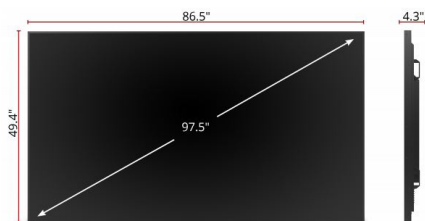

1. Internal Speakers
2. VESA® Compatible Wall Mount 800 x 600 mm
3. Menu Controls
4. Power Switch
5. AC In
6. HDMI Out

7. SPDIF
8. USB Type A x2
9. DisplayPort
10. HDMI x2
11. VGA
12. Audio In
13. RS232 In

14. LAN x2

## DISPLAY

Panel Size:	98"
Type/ Tech:	TFT LCD Module with LED Backlight
Display Area (mm):	2158.848mm*1214.352mm
Native Resolution:	3840 x 2160
Aspect Ratio:	16:9
Colours:	1.07B (10bit)
Brightness:	500 nits(typ.)
Contrast Ratio:	1300:1
Response Time:	5 ms(typ.)
Viewing Angles:	H = 178, V = 178 (typ.)
Backlight Life:	30,000 hrs(min.)
Surface Treatment:	3H, Haze 1% (typ)
Bezel:	20.3mm
Orientation:	Landscape

## INPUT

HDMI:	x2 1 port to support CEC
RGB / VGA:	1
DisplayPort:	DP1.2 x1
Audio:	PC audio in (3.5 mm) x1
RS-232:	x1
OPS:	OPS x1 SDM-L x1

## OUTPUT

HDMI:	HDMI2.0 x1
Audio:	3.5mm Earphone Out x1
SPDIF:	x1

## LAN

RJ45:	X2 10M/100
-------	---------------

## USB

Type A:	USB2.0 x2
---------	-----------

## SPEAKERS

SPEAKERS:	16W x2
-----------	--------

## COMPATIBILITY

HDMI:	HDMI in: 4k@60Hz HDMI out: 1080/4k @60Hz
DisplayPort:	3840x2160@60Hz
Android Version:	Resolution: 1080p

## POWER

Voltage:	100-240VAC +/- 10% Wide Range
Consumption:	On: 385W(Typ.) Off: <0.5W

## ERGONOMICS

Wall Mount (VESA®):	800x600mm
---------------------	-----------

## OPERATING CONDITIONS

Temperature (° C):	0°C to 40°C
Humidity:	20% ~ 80% RH non- condensing

## DIMENSIONS (W X H X D)

Physical (mm):	2198.8*109.5*1253.8mm
Packaging (mm):	2525*435*1750mm

## WEIGHT

Net (kg):	98.15 kg
Gross (kg):	153.65 kg

## REGULATIONS

REGULATIONS:	cTUVus- FCC/ICES003 Class B- EPEAT ES8 Mexico CoC Mexico Energy EMC/CE-EU CB-EU RoHS Green BOM & RoSH DoC REACH WEEE (Doc & Disassembly report) ErP EAC(local apply) UKrSEPRO(local apply)
--------------	--

## PACKAGE CONTENTS

PACKAGE CONTENTS:	1. US/EU/UK/AU power cord 3M 2. QSG 3. Compliance statement 4. HDMI cable 3M*1 5. Remote control with AAA batteries 6. Webcam plate 7. Wall mount screws
-------------------	---