
## Key Features

- All-in-one myViewBoard™ suite with Whiteboard,
   Display, and Manager
- Pen-on-paper writing experience with Ultra Fine Touch Technology
- Front-facing dual speakers to deliver attention-grabbing sound
- Webcam bracket easily attached with camera for better engagement
- Quad Core CPU with upgraded storage powered by Android 9.0 OS



# Product **Description**

The ViewBoard® 32-2 series is an advanced model that provides a comprehensive solution for schools and teachers looking to deliver more interactive and engaging lessons. Clearer colors, more vibrant contrast, and less glare are achieved thanks to 4K UHD display's bonding technology. With 20-point touchscreen interface, users collaborate naturally either with a finger or one of the ViewBoard styluses. The display integrates Ultra Fine Touch Technology which brings a paper-like writing experience with instant response and high accuracy. The dual-tip pen support allows you to simultaneously write or draw with two different colors. Seamless software integration is assured by the built-in access to the myViewBoard suite that brings together all the hardware. With upgraded RAM and storage, ViewBoard 32-2 Series offers instant connectivity and effortless usability for classroom engagement.

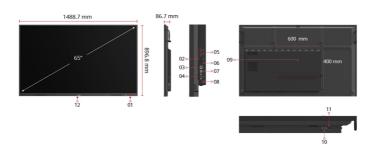

- 1. Smart Port USB™ X 2
- 2. Camera
- 3. LAN
- 4. RS232
- 5. HDMI X 2
- 6. USB 2.0

- 8. Touch
- 9. Audio Out
- 10. VGA
- 11. Audio In
- 12. Wi-fi Module Slot

Visit Us www.viewsonic.com

DISPLAY		BUNDLE SOFTWAR	
Panel Size:	65"	Basic Annotation Sof	
Panel Type:	TFT LCD Module with DLED Backlight.		
Display Area (mm):	1428.48(H)x 803.52 (V) (64.5" diagonal)	Pro Annotation Softw	
Aspect Ratio:	16:9		
Resolution:	UHD 3840x2160(Pixels)	Wireless Presentation	
Colors:	1.07B colors (8bit+FRC)	SPECIAL FEATURES	
Brightness:	350 nits (typ.)	All-in-one USB port:	
Contrast Ratio:	4000:1		
Response Time:	6.5ms	Simple LAN sharing b	
Viewing Angles:	H=178, V=178typ.	and slot-in device:	
Backlight Life:	30,000 Hours (Min)	Light Sensor:	
Surface Treatment:	Hardness: 9H Anti-	POWER	
Onit on the time.	glare coating	Voltage:	
Orientation: PLATFORM	Landscape	Consumption:	
PLATFORIVI	ARM quad-core	ERGONOMICS	
Processor:	Cortex-A55	Wall Mount (VESA® )	
RAM:	4GB DDR4	OPERATING COND	
Storage:	32 GB	Temperature (° C):	
TOUCH		Humidity:	
Type/ Tech:	Ultra Fine Touch Technology	DIMENSIONS (W X	
Touch Point:	20 points touch, 2 points writing	Physical (inch / mm):	
INPUT		Packaging (inch / mm	
HDMI:	HDMI 2.0 x2 (3840x2160 @60Hz)	WEIGHT	
RGB / VGA:	x1	Net (lb / kg):	
Audio:	x1	Gross (lb / kg):	
RS232:	x1	REGULATIONS	
OPS:	x1 (Optional Intel Standard OPS)	EMC/CE, CB/LVD, G ECAS, LBL (Low Blue SCIP, WEEE, TPCH,	
WiFi:	x1 (Optional VB-WIFI- 002/VB-WIFI-004)	ErP-Eco	
OUTPUT	,	1 Power cord / 2 Per	
Audio:	x1	1. Power cord / 2.Rer 3.USB touch cable / 4 Guide + Compliance s Screw x 4 ( wall moun	
LAN			
RJ45:	x1	10. Camera plate x1	
USB		COMPATIBLE SLOT	
Type A:	USB2.0 Front x2; Side x2	VPC12-WPO/VPC25/	
Туре В:	x1 for HDMI/VGA touch		

**SPEAKERS** 10W x 2

**TOP CAMERA PLATE** 

**EMBEDDED OS** Android 9

#### RE

Basic Annotation Software:	myViewBoard Whiteboard
Pro Annotation Software:	myViewBoard Whiteboard for Windows (Embedded in optional Windows Slot-in PC)
Wireless Presentation:	myViewBoard Display & ViewBoard Cast
CDECIAL FEATURES	

#### S

All-in-one USB port:	(combine slot-in PC/Android/HDMI USB port) Front "SmartPort™ USB" to all channels.
Simple LAN sharing between IFP and slot-in device:	10/100M for Android & Slot-in PC
Light Sensor:	Yes
POWER	
Voltage:	162V-264V +/- 10%
Consumption:	On: 175W(typ.)

Off: ≤ 0.5W\

600\*400

## DITIONS

0°C to 40°C 10% ~ 90% RH noncondensing

## X H X D)

1489×897×87 mm / 58.6x35.3x3.4 in 1628×208×1005 mm / m): 64x8.2x39.5 in

38.3kg/84.4lb 46.0kg/101.4lb

GOST-R / EAC, FAC, RCM, BIS, ue Light Certification), RoHS, REACH, I, Packing waste, CA65, Green BOM,

#### NTS

emote control with AAA battery / / 4. Touch pen x 2 / 5. Quick Start e statement / 6. RS232 adapter / 7. unt 4) / 8. HDMI cable / 9. Clamp x5 /

## T-IN PC

5/VPC2C/VPC27 series